

FREE SAMPLE SERVICE – CALL FOR DETAILS

SMITHS
BLETCHINGTON

self-binding path gravel

Self-Binding Path Gravel

Smiths' Self Binding Path Gravel is a very versatile product. Ideal for paths and pedestrian area's particularly if you require a firm compact surface for wheelchair access, golf buggies/trolleys, or for cycle paths, it also has a wide range of other applications, from the garden path to countryside walkways.

Easy to lay and very durable this Self Binding Path Gravel is an attractive yet inexpensive way of creating your required surface- whether for a public space or for use in your garden.

When laid correctly self-binding gravel produces a closed and stable surface with a charming Cotswold loose stone finish on the surface. Its finish is one of a natural, rustic appearance and will blend into most landscaping situations.

Overleaf are brief details on how to prepare the ground and lay the self-binding gravel.

If in any doubt, please contact a professional contractor.

Specifications and information


If you require further advice, information or specifications on this product please do visit our website, where you can find all the information on the Self Binding Gravel. You can, of course telephone our sales office and talk through your requirements.

DELIVERY NATIONWIDE – CALL FOR DETAILS

Delivery can be in small bags (pallet), large bags or in bulk (loose) throughout most of mainland Britain - but please do get in contact to confirm delivery details.

Sales department **01869 331281**
email **Info@smithsbletchington.co.uk**

Self Binding Path Gravel

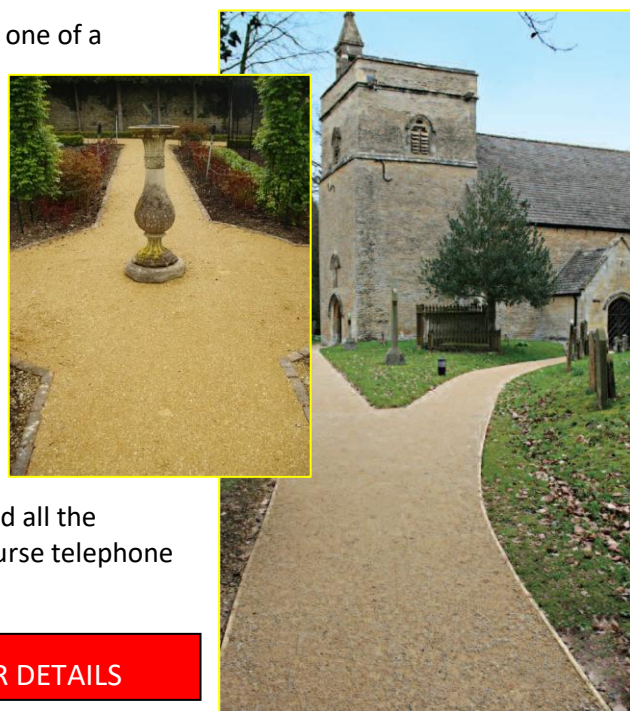


self-binding path gravel

A crushed limestone gravel material which is suitable as a top dressing for footpaths.


Laying Instructions:

1. Excavate the formation to the required depth depending on use, for footpaths to a depth of 150mm compact using a vibrating roller. Fix edgings according to requirements, either wood or concrete to level and line as required.

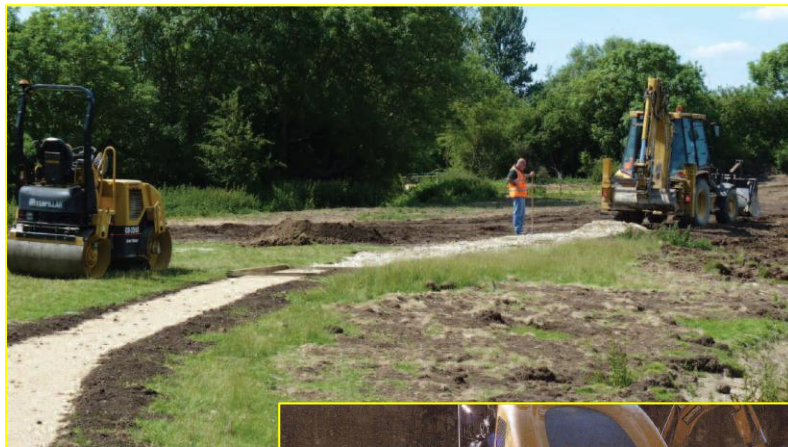

2. Lay sub-base material to a depth of 150mm for footpaths and compact using a roller. The material used should be a Type1 or similar.

3. The Path Gravel requires an adequate moisture content to achieve the required compaction. During spells of hot dry weather, it maybe best practise to add water to the material and mix in prior to levelling out.

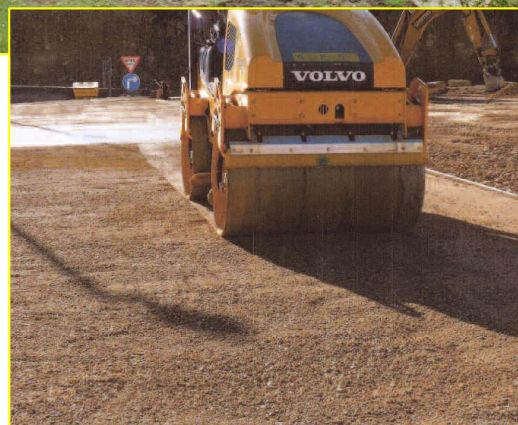

4. The Path Gravel can then be spread and compacted to achieve a finished depth of 50mm to 75mm, creating a camber to assist run off when there is heavy rainfall.

It is advisable not to traffic the finished area for two to three days after finishing & possibly more time in wintery & wet condition.

For best results it is advisable to avoid installing the material in adverse weather conditions, for example severe frosts or extended periods of wet weather.

www.smithsbletchington.co.uk

Info

Further advice and information can be obtained by telephoning our Technical Department on 01869 331281 or email info@smithsbletchington.co.uk

These are guidelines only. Smiths & Sons Bletchington Ltd are not responsible for work or results of that work undertaken by individuals or contractors hired by the customer. Smiths & Sons Bletchington Limited ©2013